EXAMTOPICS

-Expert Verified, Online, **Free**.



CERTIFICATION TEST

-CertificationTest.net - Cheap & Quality Resources With Best Support

Question #1 *Topic 1*

A manager is using a FortiNAC-F control manager to deploy an N+1 HA cluster.

Which cluster member must be added first to begin the configuration?

A. Secondary

B. Worker

C. Primary

D. Manager

Suggested Answer: *C*


Currently there are no comments in this discussion, be the first to comment!

Question #2 *Topic 1*

Refer to the exhibit.

After a successful layer 2 poll, two hosts were learned on the same port. The port is a member of the Role-Based Access and Forced Registration groups. The switch has been configured to leverage a single isolation VLAN.

How will FortiNAC-F manage this port?

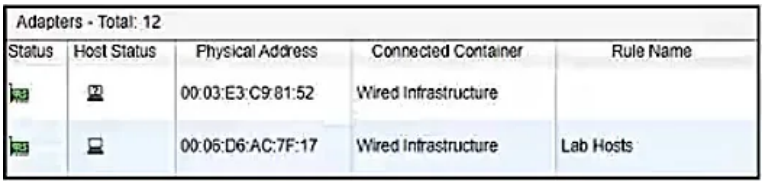

Adapters - Total: 12

Status	Host Status	Physical Address	Connected Container	Rule Name
		00:03:E3:C9:81:52	Wired Infrastructure	
		00:05:D6:AC:7F:17	Wired Infrastructure	Lab Hosts

A. The port will be provisioned to the isolation network.

B. The port will be added to the Access Point Management group.

C. The port will be provisioned for the normal state host, but the second host will have access to only the isolation portal page.

D. The port will be provisioned as an uplink to a hub or unmanaged switch.

Suggested Answer: *D*
Two learned hosts on one port indicate an uplink to a hub or unmanaged switch.

Currently there are no comments in this discussion, be the first to comment!

Question #3 *Topic 1*

Which two requirements must be met to set up an N+1 HA cluster? (Choose two.)

A. A FortiNAC-F device designated as a secondary

B. At least two FortiNAC-F devices designated as primary

C. A dedicated VLAN for primary and secondary synchronization

D. A FortiNAC-F manager

Suggested Answer: *A, D*

Currently there are no comments in this discussion, be the first to comment!

Question #4 *Topic 1*

An administrator wants FortiNAC-F to pass firewall tags to FortiGate to leverage dynamic address groups used in firewall policies.

On FortiNAC-F, what determines the values that are passed?

A. RADIUS group attribute

B. Device profiling rule

C. Model configuration

D. Security rule

Suggested Answer: *C*

Currently there are no comments in this discussion, be the first to comment!

Question #5 *Topic 1*

An organization has FortiNAC-F deployed and is using layer 3 isolation networks across multiple sites with firewalls.

At a minimum, which three protocols must be allowed between the isolation networks and FortiNAC-F? (Choose three.)

A. DDNS

B. HTTP/HTTPS

C. DHCP

D. NTP

E. DNS

Suggested Answer: *B, C, E*

Currently there are no comments in this discussion, be the first to comment!

Question #6 *Topic 1*

By default, when would a port in the FortiNAC-F network inventory view become a learned uplink?

A. When the port is connected to another modeled infrastructure device

B. When the port is configured as a trunk port on the infrastructure device

C. When the port shows more than 20 MAC addresses connected at the same time

D. When the port is added to the Access Point Management group


Suggested Answer: *A*

Currently there are no comments in this discussion, be the first to comment!

Question #7 *Topic 1*

Refer to the exhibit.

Given this topology, and a layer 3 registration network configuration, which IP address would be designated in the DHCP relay configuration for the registration network?

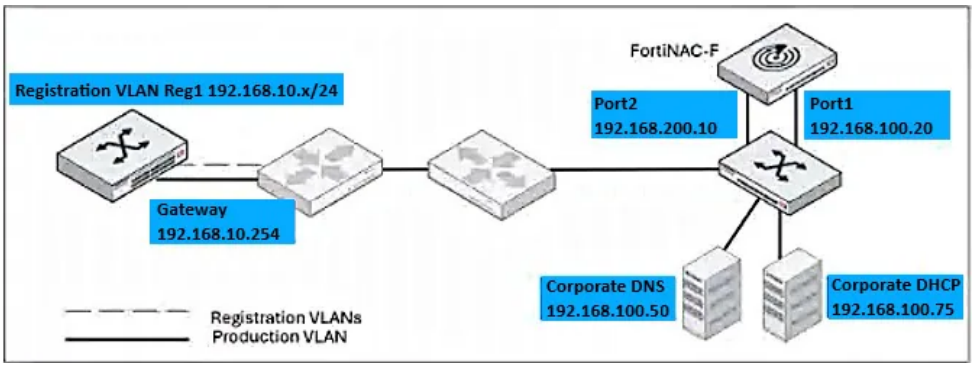

A. 192.168.200.10

B. 192.168.100.20

C. 192.168.100.75

D. 192.168.10.254

Suggested Answer: *D*
The registration VLAN gateway is the relay target shown in the topology.

Currently there are no comments in this discussion, be the first to comment!

Question #8 *Topic 1*

An administrator has created several device profiling rules and evaluated all existing devices in the database.

Some of the devices appear in the profiled devices view because they matched a rule, but they remain unknown and the registration column in the profiled devices view shows "No".

What is the most likely cause?

A. The devices match more than one device profiling rule.

B. The device profiling rule has registration set to manual.

C. The devices have persistent agents installed, and the point of connection has PA optimization enabled.

D. The confirm device profiling rule option is not enabled.

Suggested Answer: *B*

Currently there are no comments in this discussion, be the first to comment!

Question #9 *Topic 1*

When creating a device profiling rule, what is an advantage of modeling the endpoint as a device in the inventory view?

A. The devices can have scheduled connection status polling.

B. The device will have historic connection logs.

C. The devices can be associated with a logged on user.

D. The devices will have connection logs.

Suggested Answer: *C*

Currently there are no comments in this discussion, be the first to comment!